

Vision with Precision for HD Security

Sony introduces the powerful addition to its network HD camera lineup, the SNC-DH140.

This dual-stream network HD camera, supporting H.264, MPEG-4, and JPEG compression formats, deliver excellent picture quality in HD 720p resolution at 30 frames per second (fps).

Incorporating the new "Exmor™" CMOS image sensor from Sony, which is specially designed for surveillance applications, this camera features state-of-the-art image-enhancement technology, such as View-DR which realizes an extremely wide dynamic range.

As a result, this camera provides not only high-quality HD images but also HD images with excellent sensitivity and visibility even in challenging lighting environments.

The SNC-DH140 mini dome Network Camera is the ideal choice for the most demanding surveillance monitoring applications.



HD


Mini Dome Network HD Camera
SNC-DH140

FEATURES

- Superior HD*1 picture quality, supporting H.264 at 30 fps
- Three codecs (H.264, MPEG-4, JPEG) and dual streaming capability
- The new "Exmor" CMOS sensor realizes high image quality and low noise for surveillance

HD

Exmor™



- Images with very high visibility with View-DR technology - the combination of Sony's cutting-edge technologies:
 - Full-capture Wide-D technology - all of the electrons converted from the captured light are fully used
 - High-speed "Exmor" CMOS sensor
 - Visibility enhancer technology

View-DR



(Actual images)

- XDNR (eXcellent Dynamic Noise Reduction) technology for clear images without motion blur under low illumination



OFF



ON

(Actual images)

- Easy Focus function/Easy Zoom function
- DEPA Advanced Intelligent Video and Audio Analytics trigger an alarm, based on user-defined rules
 - Intelligent Motion Detection with virtual borderline function
 - Tamper Alarm



- Power over Ethernet (PoE) capability

- ONVIF conformance (Open Network Video Interface Forum)




*1 1280 x 720

SPECIFICATIONS


	SNC-DH140
Camera	
Image device	1/3 type progressive scan "Exmor" CMOS sensor
Minimum illumination	Color : 0.20 lx, B/W : 0.10 lx (F1.2/View-DR OFF/XDNR ON-Middle/VE OFF/AGC High/50 IRE[IP])
Number of effective pixels (H x V)	Approx. 1.4 Megapixel
Electronic shutter speed	1s to 1/10000s
Auto gain control	Max. gain setting LOW, MID, HIGH
Exposure control	Auto, EV Compensation ^{*1} , Auto Slow Shutter ^{*2}
White balance mode	Auto (ATW, ATW-Pro), Preset, One-push WB, Manual
Lens type	Vari-focal lens
Zoom ratio	Approx. 2.9X
Horizontal viewing angle	31.2 to 85.4 degrees
Focal length	f=3.1 to 8.9 mm
F-number	F1.2 (wide), F2.1 (tele)
Powered Focus	Yes (Easy Focus)
Powered Zoom	Yes (Easy Zoom)
Camera Features	
Day/Night ^{*3}	Yes
Wide-D	View-DR ^{*4} (125 dB: Theoretical)
Image enhancement	Visibility Enhancer
Noise reduction	XDNR
Image	
Codec image size (H x V)	1280 x 1024, 1280 x 960, 1280 x 800, 1280 x 720, 1024 x 768, 1024 x 576, 800 x 480, 768 x 576, 640 x 480, 640 x 368, 384 x 288, 320 x 240, 320 x 192
Video compression format	H.264, MPEG-4, JPEG
Maximum frame rate	H.264/MPEG-4/JPEG: 30 fps (1280 x 720)
Audio	
Audio compression	G.711/G.726
Scene Analytics	
Intelligent motion detection	Yes (with built-in Post Filter)
Intelligent object detection	No
Network	
Protocols	IPv4, IPv6, TCP, UDP, ARP, ICMP, IGMP, HTTP, HTTPS, FTP (client/server), SMTP, DHCP, DNS, NTP, RTP/RTCP, RTSP, SNMP (MIB-2)
ONVIF conformance	Yes
Wireless network	No
Number of clients	10
Authentication	IEEE802.1X
Analog Video Output	
Signal system	NTSC/PAL
Horizontal resolution	600 TVL
S/N ratio	More than 50 dB
Interface	
Ethernet	10BASE-T / 100BASE-TX (RJ-45)
Serial interface	No
Card slots	No
Analog video output	Composite video (1Vp-p)
Sensor input	x 1
Alarm output	x 2
External microphone input	Mini-jack (monaural), MIC IN/LINE IN: 2.5 V DC plug-in power
Audio line output	Mini-jack (monaural), Max output level: 1 Vrms
General	
Mass	Approx. 750 g (1 lb 10 oz)
Dimensions (ø x H)	140 x 118 mm (5 5/8 x 4 3/4 inches)
Power requirements	PoE, AC 24 V, DC 12 V
Power consumption	8.0 W max.
Operating temperature	-10 to +50 °C ^{*5} (-14 to 122 °F)
Storage temperature	-20 to +60 °C (-4 to 140 °F)
System Requirements	
Operating system	Windows XP, Windows Vista
Processor	Intel Core2 Duo 2 GHz or higher
Memory	1 GB or more
Web browser	Microsoft Internet Explorer Ver6.0, Ver7.0
Supplied Accessories	
CD-ROM (User's guides, SNC Toolbox), Installation manual, Template, Wire rope, Bracket, LAN cable, BNC cable, Power input cable, I/O cable, Audio Cable, Warranty booklet, M4 shoulder screw, M4 screws (2)	

^{*1} Visibility Enhancer off mode only ^{*2} View-DR off mode only ^{*3} Removable IR Cut Filter ^{*4} View-DR technology is a combination of Sony's full-capture Wide-D technology, the high-speed "Exmor" CMOS sensor, and Visibility Enhancer. ^{*5} Cold start temperature must be greater than 0°C.


SYSTEM CONFIGURATIONS

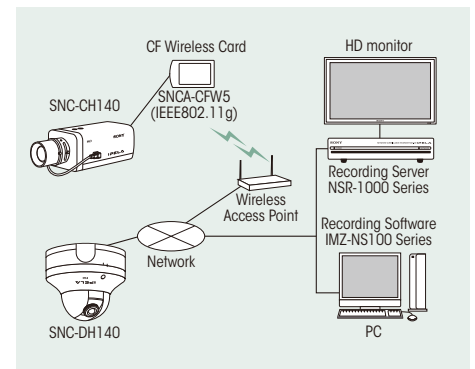

DIMENSIONS

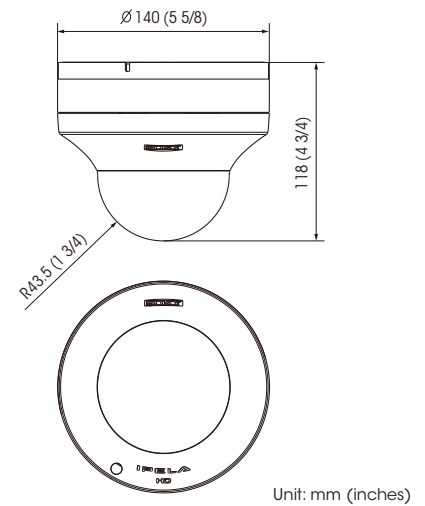

CONNECTORS

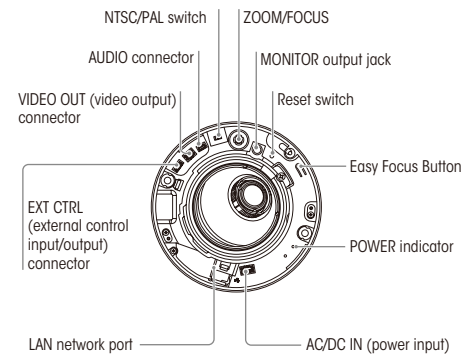

* The SNC-DH140 include software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>).

Distributed by

© 2010 Sony Corporation. All rights reserved.
Reproduction in whole or in part without written permission is prohibited.
Features and specifications are as of version 1.0 or later and subject to change without notice.
The values for weight and dimension are approximate.
Sony is a registered trademark of Sony Corporation.
IPELA and "Exmor" are trademarks of Sony Corporation.
Windows, XP, and Vista are trademarks of Microsoft Corporation.
Core is a trademark of Intel Corporation.
All other trademarks are the property of their respective owners.