

VSD-361P

All-weather 24-hour outdoor Speed Dome

Vista Series VSD-361P Speed dome adopt Sony 1/4" IT CCD, built-in f=3.6~129.6mm Lens, which has 36x Optical Zoom, and 12x Digital Zoom; 360° Continuously rotation, High Performance Memory; 128 Presets and Real time Power off Memory, True Day/Night, Self-learning Auto tracks, Auto Scan, Programmable Vector Scan Groups and Privacy Zones, IP66 rated water and dust resistant.

This camera comes with excellent quality and highly cost-effective.

Features

High Resolution:

1/4" IT CCD SONY, 480TVL (Color Mode), 520TVL(B/W Mode)

All-weather 24-hour:

ICR True Day/Night, IP66 Standard, Lighting & surge protector, High strength metal housing, Heater and Fan.

High Speed:

Panning Speed 0.1~288°/Sec, Tilt Speed 0.1~90°/Sec, Preset mode at 360°/Sec, Accuracy +/-0.3°

High performance memory:

128 Preset positions(maximum), 3 self-learning auto tracks(120seconds per track), 6 Vector scan groups, Intelligent power off real time memory, 24 Privacy Mask Zones.

Quick Installation:

Hot plugging technology, Wall & suspensory mounting selectable

Digital turn over function, Built-in multi protocol.




Specification

Model	VSD-361P
Sensor	1/4" IT HAD CCD, Sony
Effective Pixels	752(H)x582(v)
Horizontal Resolution	480TVL (Color) , 520TVL (B/W)
Synchronization	Internal/External(V-Lock)
Video Out	(1.0Vp-p), 75ohm, BNC
Minimum illumination	1.0lx (30IRE): IR Cut Filter On
	0.1lx (30IRE): IR Cut Filter Off
	0.001lx: DSSx256-ON
	0.0001lx (30IRE): Night ON+DSS
Electronic Shutter	1/50~1/10,000 Sec
Signal-to-Noise Ratio	> 50dB(AGC Close)
White Balance	Manual/Auto/Indoor/Outdoor/ATW
BLC	BLC ON/OFF
Zoom	36x Optical Zoom,12x Digital Zoom

Aperture Range	F1.6(wide)~F4.2(tele)
Focal Length	f=3.6mm ~ 129.6mm
Angular Field of View	53.8°(wide)- 1.64°(tele)
Dome Size	6"
Pan Angle	360° Continues rotation
Tilt Angle	0° ~90°
Pan Speed	0. 1° ~288°/Sec
Tilt Speed	0. 1° ~90°/Sec
Preset Speed	360°/Sec
Accuracy	0.3°
Turn Over	Digital Turn Over
PTZ Tours (Pattern)	3 Programmable, 120 Seconds
Vector Scan Groups	6
Auto Scan	ON/OFF
Preset Positions	128 Maximum
Power off real time Memory	Yes
Long-focus speed-limited	ON/OFF
Protocol	Pelco D/P, KD6, VCL, Scandome II (F2), Maxpro Mode
Camera ID Range	0~255
Control	RS-485
Power Input	24VAC 2A 60Hz/50Hz, Surge Protector
Operation Temperature	-20℃~55℃
Power Consumption	35W
Certification	CE, FCC
Size	195.4(Φ) X 265.4(H)MM
Weight	3KG

Size(mm)

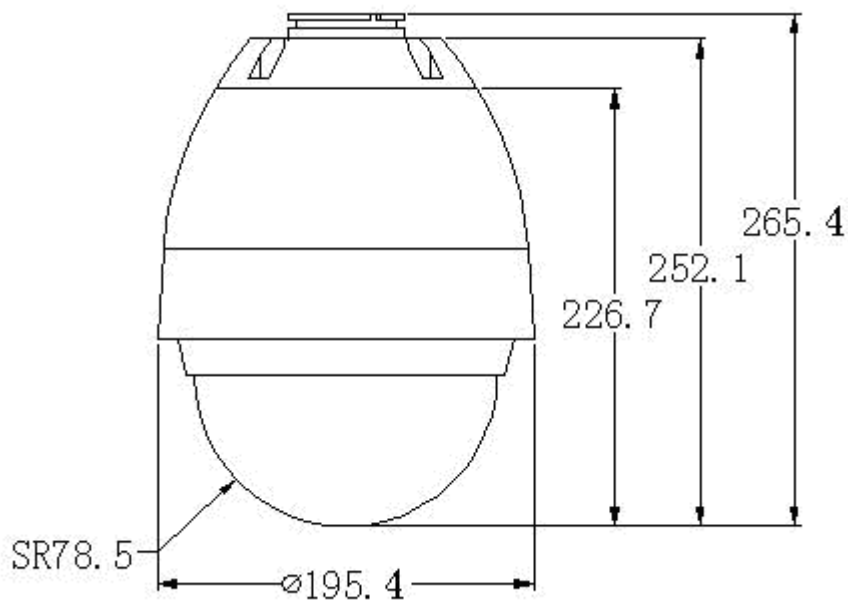

Package

Qty	Components
1	VSD Speed Dome Camera
1	Operation Manual
1	Wall Mounting Bracket
1	Power Supply
1	Video & Control Cable

Typical Structure

